


FlexLine

SX-FL-298-O-AGWv2a

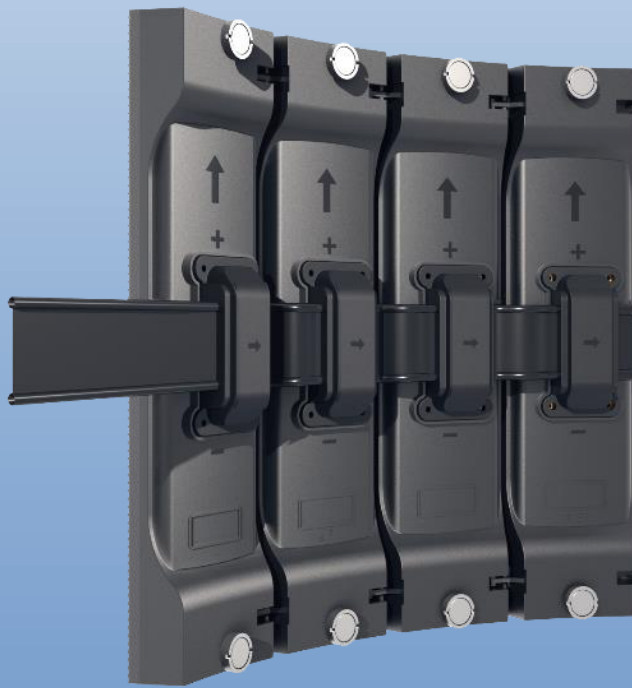

Outdoor Flexible LED display

Techn. Daten LED Screen: FlexLine

Product details	SX-FL-298-O-AGWv2a
Pixel Pitch (mm)	2,98
Physical Density (Pixel/m2)	112.896
LED Arrangement	1R1G1B
LED Type	SMD1515
Pixelcard Size (mm)	250 x 250
Pixelcard resolution (Pixel)	84 x 84
Drive Mode	Constant Drive
Scanning Mode	1/14
Horizontal Viewing Angle (Deg.)	140
Vertical Viewing Angle (Deg.)	90
Brightness NIT (cd/m2)	Max. 4000
Grey Scale	14 -16 Bit
Refresh Rate (Hz)	≤3840
High Refresh Rate IC Driver	High Refresh
Max Power Consumption (W)	680 / sqm
Average Power Consumption (W)	225 / sqm
Cabinet Size (mm)	250 x 250
Control Box Size/Weigth/Load Capacity	~340 x 150 x 63(mm) / ~2,3kg / 6 Modules
Cabinet Resolution (Pixel)	84 x 84
Cabinet Thickness (mm)	~32
Weight (Kg)	~ 20kg / qm plus wiring
Cabinet Material	Aluminium
Color (Mio)	>16.7
Serviceability	Front Service
Input Voltage (V)	AC 240V +/- 10% @ 50Hz
Protection Level	IP67
Working Temperature (°C)	-20° - +50°
Operation Humidity (RH)	10% - 90%
LED Control System Design	Novastar
Certificates	CE, ROHS, PFC, EMC Class A, LVD

We reserve the right to alter technical details without prior notice. 03/2021 TK