


# FlexLine

SX-FL-313-i-ACWv10a

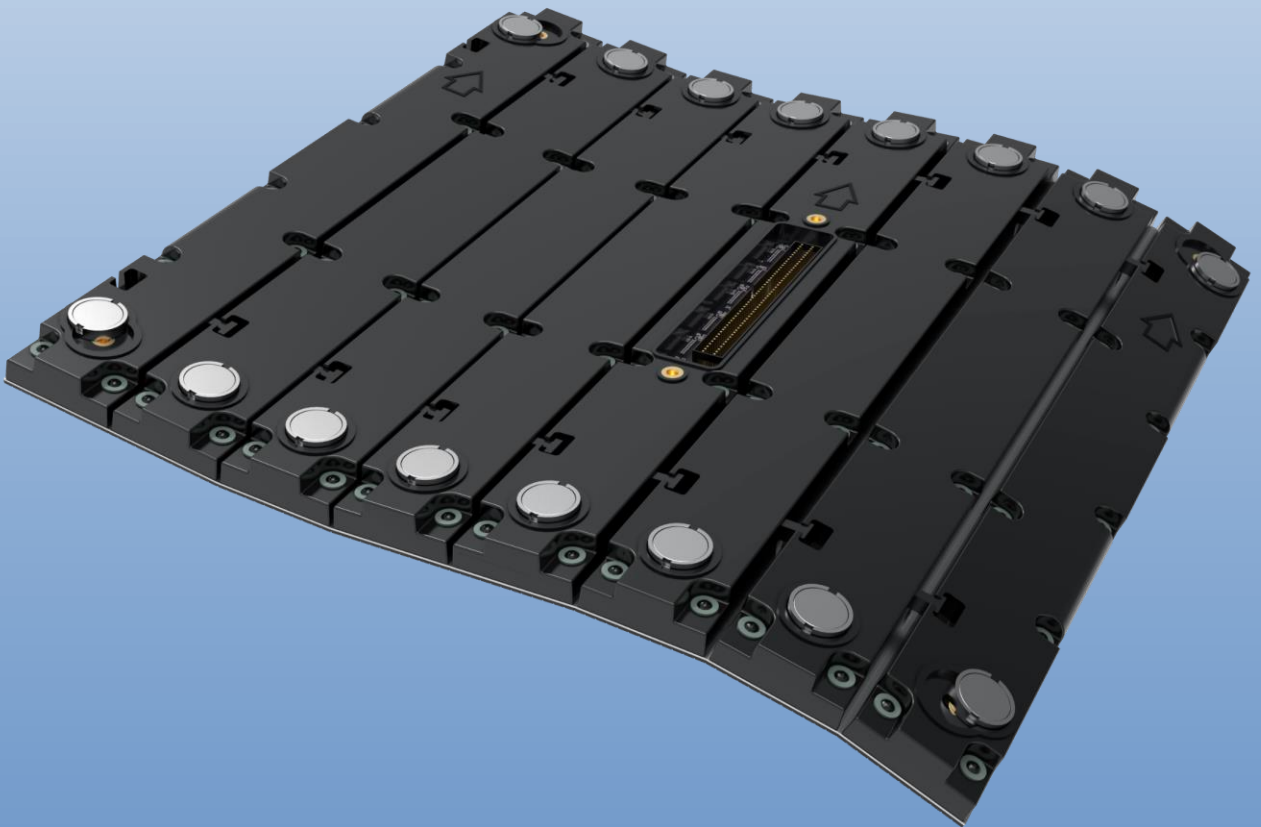

## Indoor Flexible LED display

## Techn. Daten LED Screen: FlexLine

Product details	SX-FL-313-i-ACWv10a
Pixel Pitch (mm)	3,13
Physical Density (Pixel/m <sup>2</sup> )	102.400
LED Arrangement	1R1G1B
LED Type	SMD2020 Copperwire
Pixelcard Size (mm)	250 x 250
Pixelcard Resolution (Pixel)	80 x 80
Drive Mode	Constant Drive
Scanning Mode	1/20
Horizontal Viewing Angle (Deg.)	120
Vertical Viewing Angle (Deg.)	120
Brightness NIT (cd/m <sup>2</sup> )	~ 1000 Nit
Grey Scale	14 -16 Bit
Refresh Rate (Hz)	≤3840
High Refresh Rate IC Driver	High Refresh
Max Power Consumption (W)	~600 / sqm
Average Power Consumption (W)	~200 / sqm
Weight (Kg/m <sup>2</sup> )	~34 KG witch cabinet Frame
Cabinet Material	Aluminium
Color (Mio)	>16.7
Serviceability	Front Service
Input Voltage (V)	AC 240V +/- 10% @ 50Hz
Protection Level	IP30
Working Temperature (°C)	-20° - +40°
Operation Humidity (RH)	10% - 90%
LED Control System Design	Novastar
Options:	External Controlbox for more Flexibility
Certificates	CE, ROHS, PFC, EMC Class A, LVD

We reserve the right to alter technical details without prior notice. 03/22 JB

**Pictures:**

