


LuxLine

SX-LL-078-i-B

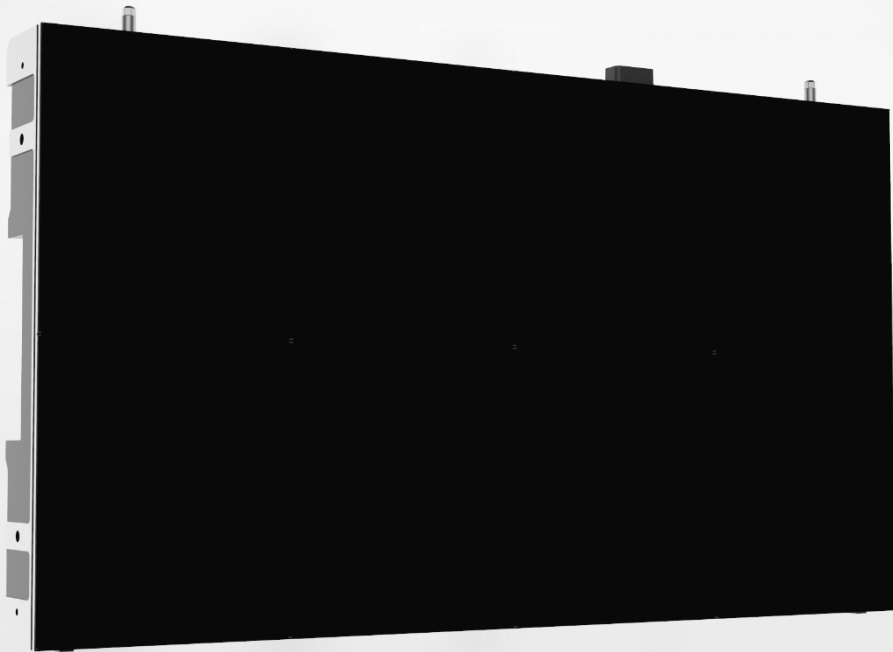

0,7mm indoor
16:9 Led Screen

Technical data LED Screen: LuxLine

Product Details	SX-LL-078-i-B
Pixel Pitch (mm)	0,78125
Physical Density (Pixel/m2)	1.638.400
LED Type	SMD / MiniLED / COB / FlipChip
Pixelcard Size (mm)	150 x 168.75
Pixelcard Resolution (Pixel)	192 x 216
Drive Mode	Constant Current / Common Cathode
Horizontal Viewing Angle (Deg.)	160
Vertical Viewing Angle (Deg.)	160
Brightness NIT (cd/m2)	~ 600 Nit (High Brightness Option)
Grey Scale	12-16 Bit
Refresh Rate (Hz)	≤ 3.840
Max Power Consumption (W/m2)	~ 600
Average Power Consumptoion (W/m2)	~ 200
Cabinet Size (mm)	600 x 337.5 / 300 x 337.5
Cabinet Thickness (mm)	~ 60
Weight (kg/m2)	~20 kg / sqm plus wiring
Cabinet Material	Aluminum
Serviceability	Front Service
Input Voltage (V)	AC 240V +/- 10% @ 50Hz
Protection Level	IP 30
Working Temperature (°C)	-10° – +50°
Operation Humidity (RH)	10% - 80%
LED Control System Design	Novastar
Certificates	CE, ROHS, PFC, EMC Class A, LVD
Options	GOB – protective front coating, High Brightness, Dual-Backup PSU
Versions	V1,V2,V10,V11, V15

We reserve the right to alter technical details without prior notice. 04/2025 ToKi

