


# FlexLine

SX-FL-391-O-AGWv2a



## Outdoor Flexible Led Display

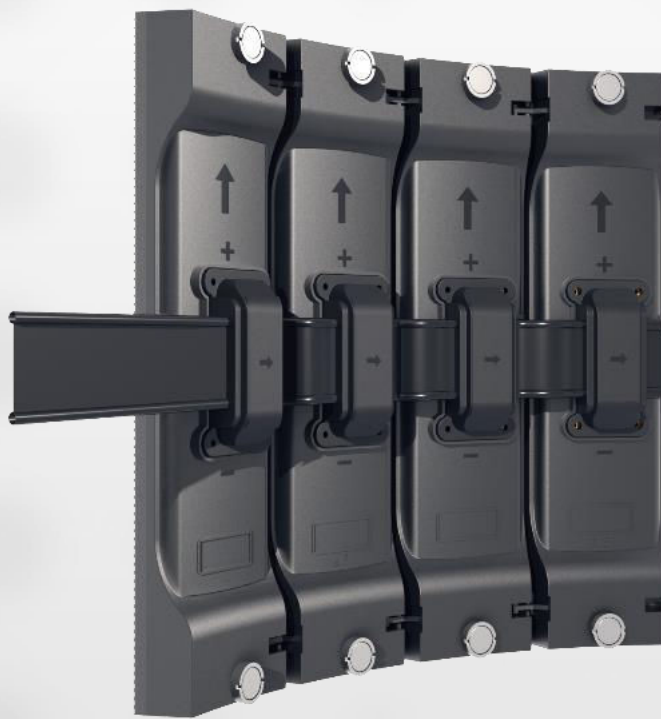

# Technical data LED Screen: FlexLine

<b>Product Details</b>	<b>SX-FL-391-O-AGWv2a</b>
PixelPitch (mm)	3,91
PhysicalDensity(Pixel/m2)	65.536
LEDArrangement	1R1G1B
LEDType	SMD1921
PixelcardSize (mm)	250 x 250
PixelcardResolution (Pixel)	64 x 64
DriveMode	ConstantDrive
Scanning Mode	1/16
HorizontalViewingAngle (Deg.)	150
VerticalViewing Angle (Deg.)	120
Brightness NIT (cd/m2)	>5000
Grey Scale	14 -16 Bit
RefreshRate (Hz)	≤3840
HighRefresh Rate IC Driver	High Refresh
Max Power Consumption (W)	660 / sqm
AveragePower Consumption (W)	220 / sqm
Control Box Size (mm) / Weigth (Kg) / Load Capacity	~ 340 x 150 x 63 / ~ 2,3 / 6 Modules
Pixelcard Thickness (mm)	32
Pixelcard Weight(Kg)	~ 20 / qm plus wiring & Sub-Structure
CabinetMaterial	Aluminium
Color(Mio)	>16.7
Serviceability	Front Service
Input Voltage(V)	AC 240V+/-10% @ 50Hz
ProtectionLevel	IP67
WorkingTemperature(°C)	-20°-+50°
Operation Humidity (RH)	10% -90%
LEDControl System Design	Novastar
Certificates	CE, ROHS, PFC, EMC Class A, LVD
Comments	Custom made and Project related Cabinets

We reserve the right to alter technical details without prior notice. 01/2024 JaBl



Pictures:

