


FlexLine

SX-FL-481-O-AGWv2a



Outdoor Flexible Led Display

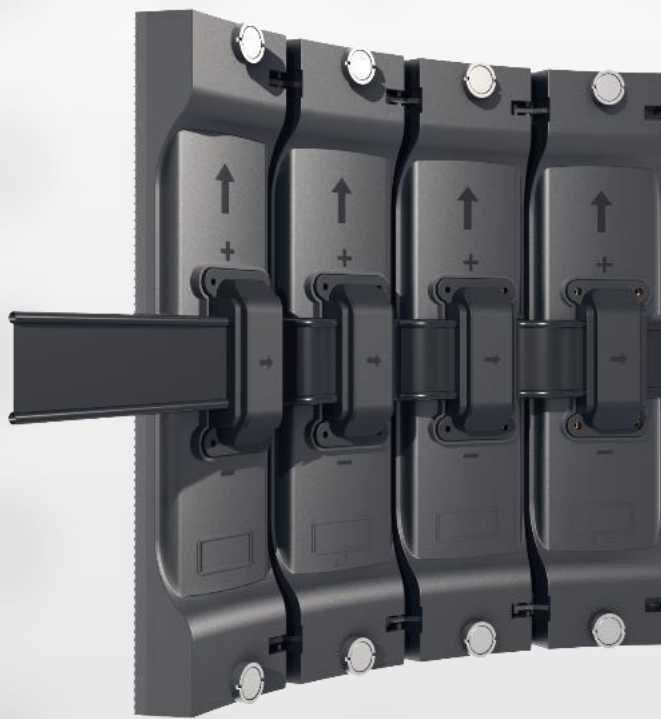

Technical data LED Screen: FlexLine

Product Details	SX-FL-481-O-AGWv2a
Pixel Pitch (mm)	4,81
Physical Density (Pixel/m2)	43.264
LED Arrangement	1R1G1B
LED Type	SMD1921
Pixelcard Size (mm)	250 x 250
Pixelcard Resolution (Pixel)	52 x 52
Drive Mode	Constant Drive
Scanning Mode	1/9
Horizontal Viewing Angle (Deg.)	140
Vertical Viewing Angle (Deg.)	110
Brightness NIT (cd/m2)	> 5000
Grey Scale	14-16 Bit
Refresh Rate (Hz)	≤ 3.840
High Refresh Rate IC Driver	High Refresh
Max Power Consumption (W/m2)	610/sqm
Average Power Consumptioin (W/m2)	205/sqm
Pixelcard Thickness (mm)	32
Weight (kg/m2)	~20 kg / qm plus wiring & Sub-Structure
Cabinet Material	Aluminum
Color (Mio.)	>16.7
Serviceability	Front Service
Input Voltage (V)	AC 240V +/- 10% @ 50Hz
Protection Level	IP 67
Working Temperature (°C)	-20° – +50°
Operation Humidity (RH)	10% - 90%
LED Control System Design	Novastar
Certificates	CE, ROHS, PFC, EMC Class A, LVD
Comments	Custom made and Project related Cabinets

We reserve the right to alter technical details without prior notice. 01/2024 JaBI



Pictures:

