


# MaxLine

SX-ML-391-O-AGWv2a



## Outdoor Fixed Led Display

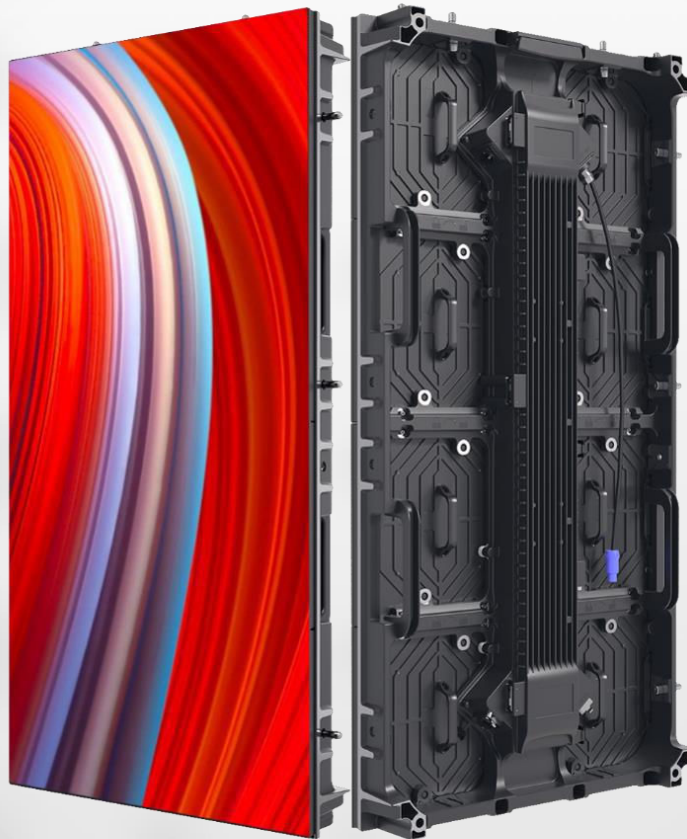

# Technical data LED Screen: MaxLine

Product Details	SX-ML-391-O-AGWv2a			
Pixel Pitch (mm)	3,91			
Physical Density (Pixel/m2)	65.536			
LED Arrangement	1R1G1B			
LED Type	SMD1921 Gold Wire			
Pixelcard Size (mm)	500 x 250	250 x 250		
Pixelcard Resolution (Pixel)	128 x 64	64 x 64		
Drive Mode	Constant Current Drive			
Scanning Mode	1/16			
Horizontal Viewing Angle (Deg.)	150			
Vertical Viewing Angle (Deg.)	120			
Brightness NIT (cd/m2)	> 5500			
Grey Scale	12-16 Bit			
Refresh Rate (Hz)	≤ 3.840			
High Refresh Rate IC Driver	High Refresh			
Max Power Consumption (W/m2)	~ 580			
Average Power Consumption (W/m2)	~ 195			
Cabinet Size (mm)	500 x 750	500 x 1000	500 x 1000	250 x 1000
Cabinet Resolution (Pixel)	128 x 128	128 x 256	128 x 192	64 x 256
Cabinet Thickness (mm)	~ 94			
Weight (kg/m2)	~32 kg / sqm plus wiring			
Cabinet Material	Aluminum			
Color (Mio.)	>16.7			
Serviceability	Front- & Rear Service			
Input Voltage (V)	AC 240V +/- 10% @ 50Hz			
Protection Level	IP 66			
Working Temperature (°C)	-20° – +50°			
Operation Humidity (RH)	10% - 90%			
LED Control System Design	Novastar			
Certificates	CE, ROHS, PFC, EMC Class A, LVD			

We reserve the right to alter technical details without prior notice. 01/2024 JaBl

