


MaxLine

SX-ML-391-O-AGWv2b



Outdoor Fixed Led Display

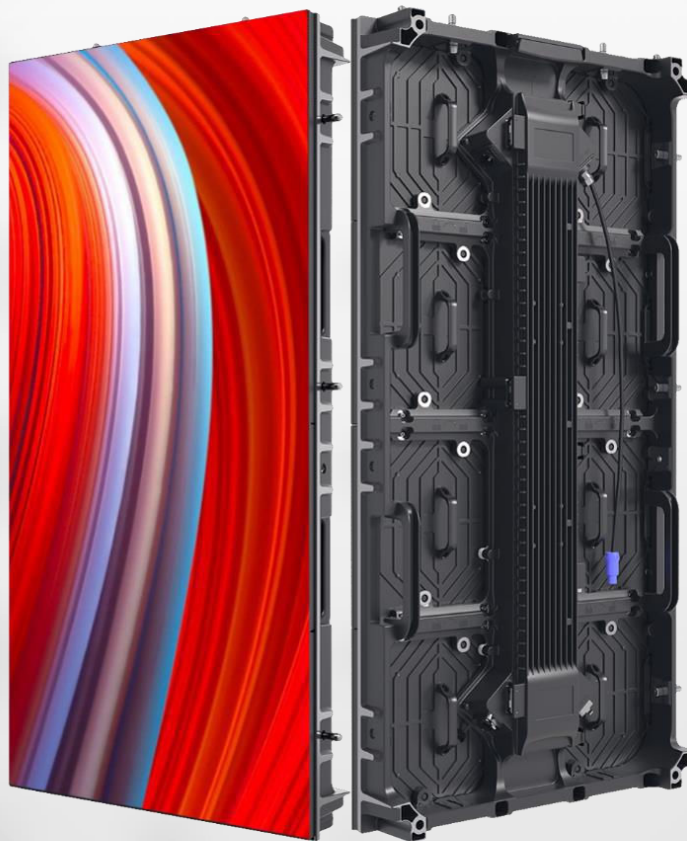

Technical data LED Screen: MaxLine

Product Details	SX-ML-391-O-AGWv2b
Pixel Pitch (mm)	3,91
Physical Density (Pixel/m2)	65.536
LED Arrangement	1R1G1B
LED Type	SMD1921 Gold Wire
Pixelcard Size (mm)	250 x 250
Pixelcard Resolution (Pixel)	64 x 64
Drive Mode	Constant Current Drive
Scanning Mode	1/16
Horizontal Viewing Angle (Deg.)	170
Vertical Viewing Angle (Deg.)	140
Brightness NIT (cd/m2)	> 6500
Grey Scale	12-16 Bit
Refresh Rate (Hz)	≤ 3.840
High Refresh Rate IC Driver	High Refresh
Max Power Consumption (W/m2)	~ 680
Average Power Consumption (W/m2)	~ 230
Cabinet Size (mm)	500 x 750 / 500 x 1000
Cabinet Resolution (Pixel)	128 x 192 / 128 x 256
Cabinet Thickness (mm)	~ 94
Weight (kg/m2)	~32 kg / sqm plus wiring
Cabinet Material	Aluminum
Color (Mio.)	>16.7
Serviceability	Front- & Rear Service
Input Voltage (V)	AC 240V +/- 10% @ 50Hz
Protection Level	IP 66
Working Temperature (°C)	-20° – +50°
Operation Humidity (RH)	10% - 90%
LED Control System Design	Novastar
Certificates	CE, ROHS, PFC, EMC Class A, LVD
Comments	Custom made and Project related Cabinets

We reserve the right to alter technical details without prior notice. 01/2024 JaBI

