


CreativeLine

SX-CL-195-i-ACWv10a

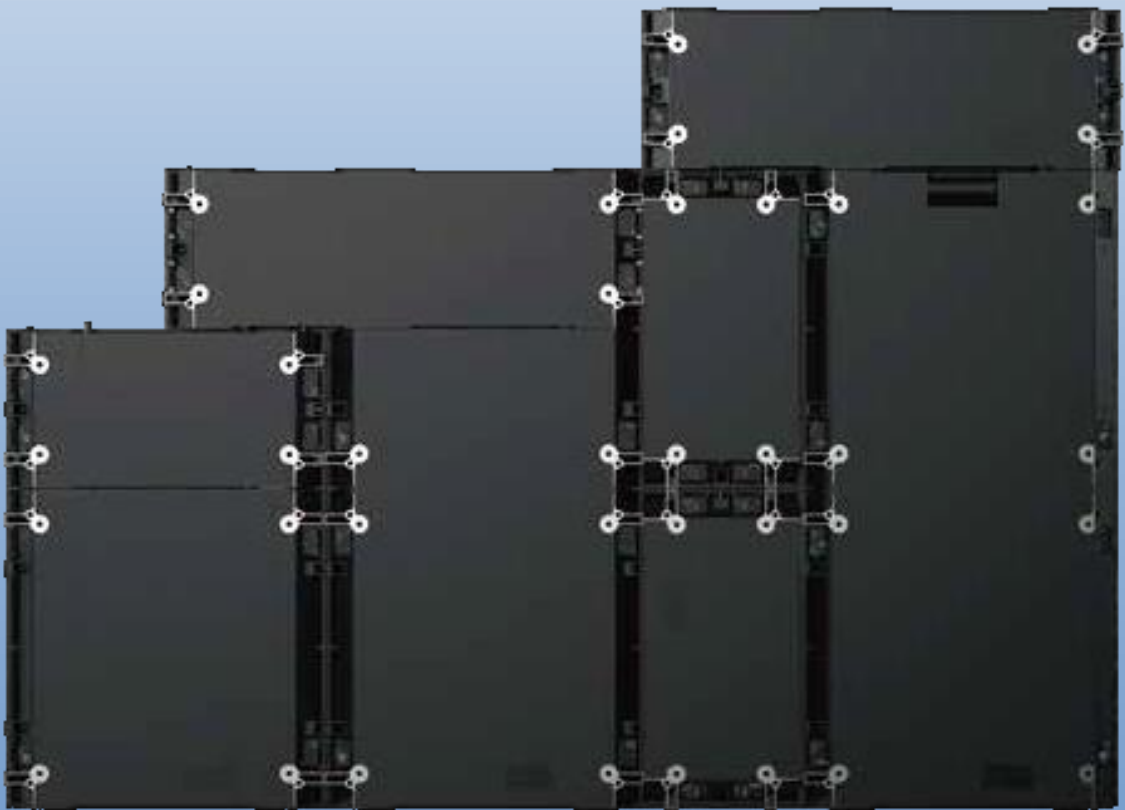

Indoor Fixed LED display

Techn. Data LED Screen: CreativeLine

Product Details	SX-CL-195-i-ACWv10a
Pixel Pitch (mm)	1,95
Physical Density (Pixel/m ²)	262.144
LED Arrangement	1R1G1B
LED Type	SMD 1010 Copperwire
Pixelcard Size (mm)	250 x 250
Pixelcard Resolution (Pixel)	128 x 128
Drive Mode	Constant Drive
Scanning Mode	1/32
Horizontal Viewing Angle (Deg.)	140
Vertical Viewing Angle (Deg.)	150
Brightness NIT (cd/m ²)	800 / 1000 NIT
Grey Scale	12 - 14 Bit
Refresh Rate (Hz)	≤ 3840
High refresh Rate IC driver	High Refresh
Max Power Consumption (W)	~600 / sqm (PSU) // ~400 / sqm (@Full-White)
Average Power Consumption (W)	~200 / sqm
Cabinet Size (mm)	500x1,000, 500x750, 500x500, 500x250, 250x500, 1,000x250, 250x750, 250x1000, 750x250
Cabinet Thickness (mm)	~47
Weight (Kg)	~25/ sqm plus Wiring
Cabinet Material	Aluminium
Color (Mio)	>16.7
Serviceability	Front Service
Input Voltage (V)	AC 240V +/- 10% @ 50Hz
Protection Level	IP 20
Working Temperature (°C)	-20° - +40°
Operation Humidity (RH)	10% - 90%
LED Control System Design	Novastar
Certificates	CE, ROHS, PFC, EMC Class A, LVD
Options	HDR (A8S RV-Card), Calibration on Module

We reserve the right to alter technical details without prior notice. 06/2022 TK