


FlexLine

SX-FL-260-i-ACWv10a

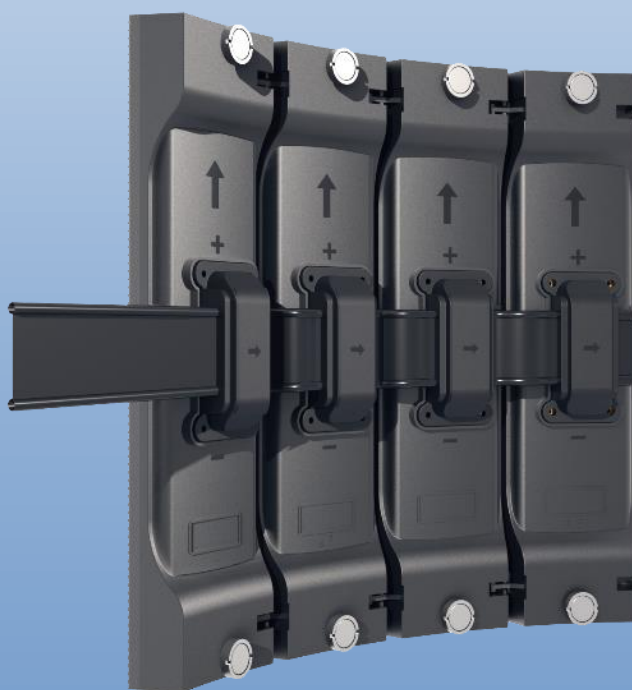

Outdoor Flexible LED display

Techn. Daten LED Screen: FlexLine

Product details	SX-FL-260-i-ACWv10a
Pixel Pitch (mm)	2,60
Physical Density (Pixel/m2)	65.536
LED Arrangement	1R1G1B
LED Type	SMD1515 Copperwire
Pixelcard Size (mm)	250 x 250
Pixelcard Resolution (Pixel)	64 x 64
Drive Mode	Constant Drive
Scanning Mode	1/16
Horizontal Viewing Angle (Deg.)	150
Vertical Viewing Angle (Deg.)	120
Brightness NIT (cd/m2)	>5000
Grey Scale	14 -16 Bit
Refresh Rate (Hz)	≤3840
High Refresh Rate IC Driver	High Refresh
Max Power Consumption (W)	660 / sqm
Average Power Consumption (W)	220 / sqm
Control Box Size (mm) / Weighth (Kg) / Load Capacity	~ 340 x 150 x 63 / ~ 2,3 / 6 Modules
Pixelcard Thickness (mm)	32
Pixelcard Weight (Kg)	~ 20 / qm plus wiring & Sub-Structure
Cabinet Material	Aluminium
Color (Mio)	>16.7
Serviceability	Front Service
Input Voltage (V)	AC 240V +/- 10% @ 50Hz
Protection Level	IP67
Working Temperature (°C)	-20° - +50°
Operation Humidity (RH)	10% - 90%
LED Control System Design	Novastar
Certificates	CE, ROHS, PFC, EMC Class A, LVD

Pictures:

