


VisioLine

SX-VL-195-i-AGWv2a

SX-VL-195-i-ACWv2a

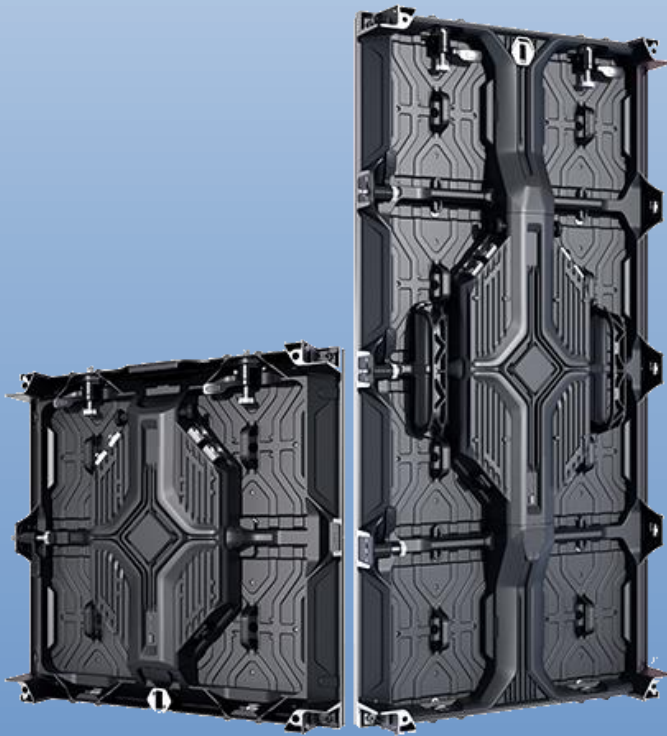

Indoor Fixed LED display

Techn. Data LED Screen: VisioLine

Product Details	SX-VL-195-i-ACWv2a	SX-VL-195-iAGWv2a
Pixel Pitch (mm)	1,95	
Physical Density (Pixel/m2)	262.144	
LED Arrangement	1R1G1B	
LED Type	SMD 1010 Copperwire	SMD 1010 Goldwire
Pixelcard Size (mm)	250 x 250	
Pixelcard Size Resolution (Pixel)	128 x 128	
Drive Mode	Constant Drive	
Scanning Mode	1/32	
Horizontal Viewing Angle (Deg.)	75	
Vertical Viewing Angle (Deg.)	75	
Brightness NIT (cd/m2)	>700	>1000
Grey Scale	12-16 Bit	
Refresh Rate (Hz)	≤ 3840	
High Refresh Rate IC Driver	High Refresh	
Max Power Consumption (W)	~ 450 / sqm	
Average Power Consumption (W)	~ 150 / sqm	
Cabinet Size (mm)	500mm x 1000mm / 500mm x 500mm	
Cabinet Resolution	256 x 512 / 256 x 256	
Cabinet Thickness (mm)	81	
Weight (Kg)	~ 30kg / qm plus wiring	
Cabinet Material	Aluminium	
Color (M)	>16.7	
Serviceability	Front & Rear Service	
Input Voltage (V)	AC 240V +/- 10% @ 50Hz	
Protection Level	IP40 Front / IP20 Rear	
Working Temperature (°C)	0° - +40°	
Operation humidity (RH)	10% - 60%	
LED control system design	Novastar	
Certificates	CE, ROHS, PFC, EMC Class A, LVD	

We reserve the right to alter technical details without prior notice. 03/2021 TK