


WorkLine

SX-WL-694-O-AGWv10a

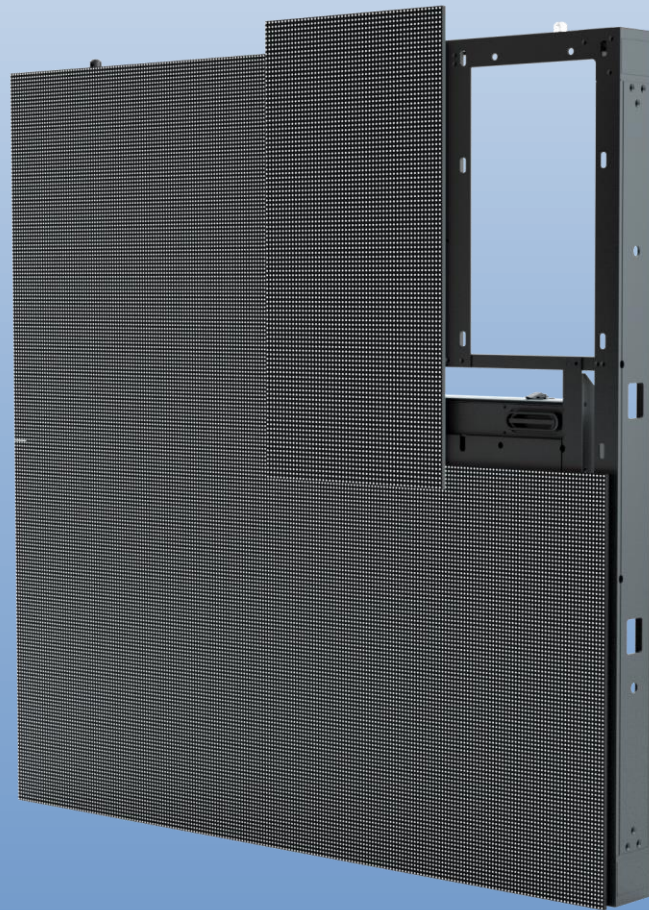

Outdoor Fixed LED display

Techn. Data LED Screen: WorkLine

Product Details	SX-WL-694-O-AGWv10a
Pixel Pitch (mm)	6,94
Physical Density (Pixel/m ²)	20.736
LED Arrangement	1R1G1B
LED Type	SMD2727 Gold Wire
Pixelcard Size (mm x mm)	250 x 500
Pixelcard Resolution (Pixel)	36 x 72
Drive mode	Constant Current Drive
Scanning Mode	1/6
Horizontal Viewing Angle (Deg.)	140
Vertical Viewing Angle (Deg.)	120
Brightness NIT (cd/m ²)	>6000
Grey Scale	12 - 16 Bit
Refresh Rate (Hz)	≤ 3.840
High Refresh Rate IC Driver	High Refresh
Max Power Consumption (W)	~700 / sqm
Average Power Consumption (W)	~210 / sqm
Cabinet Size (mm)	1,000×1,000 / 1,000×500 / 750×1,000 / 750×500
Cabinet Thickness (mm)	~86
Weight (Kg)	~ 33kg / sqm plus wiring
Cabinet Material	Aluminium
Color (Mio)	>16.7
Serviceability	Front- & Rear Service
Input Voltage (V)	AC 240V +/- 10% @ 50Hz
Protection Level	IP65 Front / IP54 Rear
Working Temperature (°C)	-20° - +60°
Operation Humidity (RH)	10% - 85%
LED Control system design	Novastar
Certificates	CE, ROHS, PFC, EMC Class A, LVD

We reserve the right to alter technical details without prior notice. 03/2022 JB