


available as
Non-Flammable LED Screen



CreativeLine

SX-CL-391-i-ACWv10a

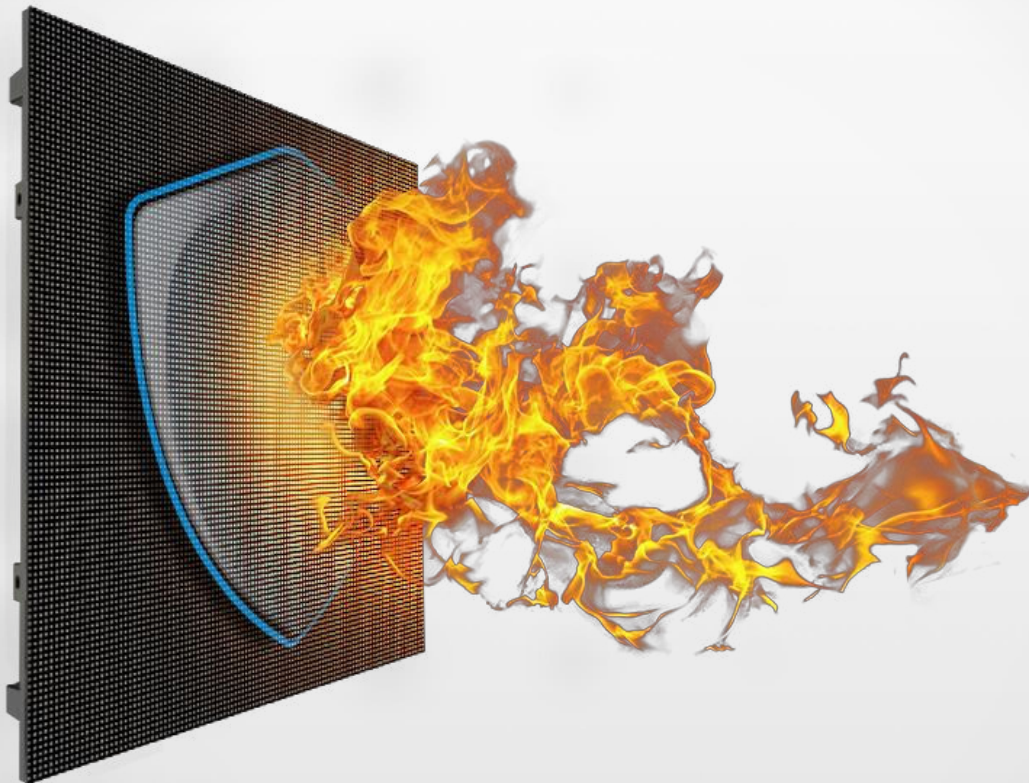

Indoor fixed LED display



Technical data LED Screen: CreativeLine

ProductDetails	SX-CL-391-i-ACWv10a
PixelPitch (mm)	3,91
PhysicalDensity(Pixel/m ²)	65.536
LEDArrangement	1R1G1B
LEDType	SMD 2020 Copperwire
Pixelcard Size (mm)	250 x 250
PixelcardResolution (Pixel)	64 x 64
DriveMode	ConstantDrive
Scanning Mode	1/16
HorizontalViewingAngle (Deg.)	120
VerticalViewing Angle (Deg.)	120
Brightness NIT (cd/m ²)	>1.000 NIT
Grey Scale	12 –16 bit
RefreshRate (Hz)	≤ 3840
Highrefresh Rate IC driver	High Refresh
Max Power Consumption (W)	~ 600 / sqm
AveragePower Consumption (W)	~200 / sqm
Cabinet Size (mm)	500x1,000, 500x750, 500x500, 500x250, 250x500, 1,000x250, 250x750, 250x1000, 750x250
CabinetThickness(mm)	~47
Weight(Kg)	~25/ sqm plus Wiring
CabinetMaterial	Aluminium
Color(Mio)	>16.7
Serviceability	Front Service
Input Voltage(V)	AC 240V+/-10% @ 50Hz
ProtectionLevel	IP 20
WorkingTemperature(°C)	-20°-+40°
Operation Humidity (RH)	10% -90%
LEDControl System Design	Novastar
Certificates	CE, ROHS, PFC, EMC Class A, LVD
Options	HDR (A8S RV-Card), Calibration on Module, High Brightness
Fire protection level	Up to A2-s1-d0 according to EN13501-1

We reserve the right to alter technical details without prior notice. 01/2024 JaBl

